



SANME



VSI 系列 立轴冲击式破碎机


*VSI Series Vertical Shaft
Impact Crusher*



上海山美环保装备股份有限公司
SHANGHAI SANME MINING MACHINERY CORP., LTD.
(中德合资控股)
(Sino-German JV Holding)

VSI系列立式冲击破碎机

VSI Series Vertical Shaft Impact Crusher

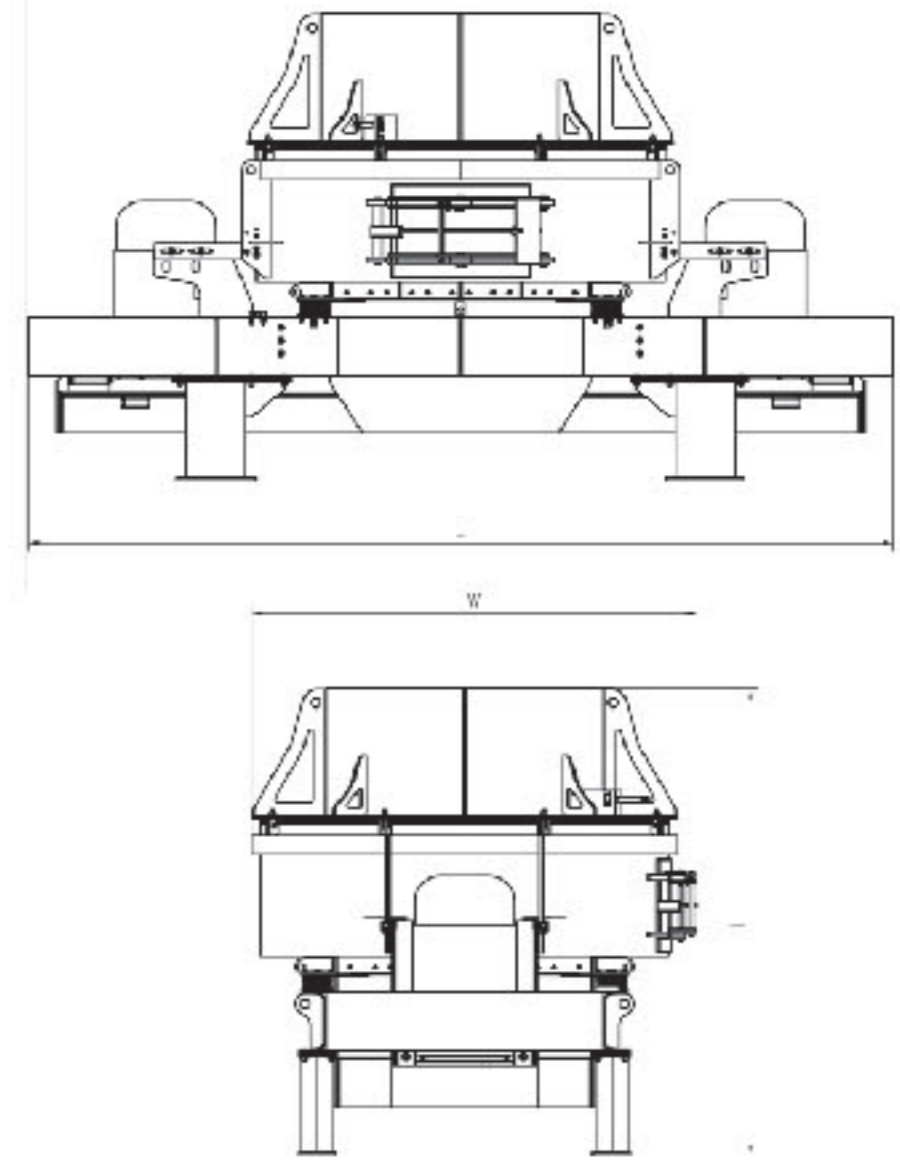

VSI系列立式冲击破碎机是我公司研制并生产的高性能制砂设备。该机有“石打石”和“石打铁”二种形式。

VSI Series Vertical shaft Impact Crusher, which are high-functioned equipment for making sand and shaping, are developed and produced by SANME. This equipment has two types: rock-on-rock and rock-on-anvil.

特点及优势

- ◎ 破碎效率高，具有细碎、粗磨功能。
- ◎ 结构简单，安装、维修方便，运行成本低。
- ◎ 产品粒形优异，呈立方体，针片状含量低。适宜骨料整形、人工制砂及高等级公路骨料生产。

Features and Benefits

- ◎ High production of crushing, has the function of fine crushing and rough grinding.
- ◎ Simple structure, easy to set up and repair, low cost in operation.
- ◎ Excellent shape of product, mainly the product shape is cubic with small fraction of elongated flaky particle shape, suitable for aggregate shaping, manufactured sand.

技术参数 Technical Data

型号 Model	最大入料粒度 Max Feed Size(mm)	叶轮转速 Speed of Rotor(r/min)	通过量 Throughput(t/h)	电机功率 Motor Power(kw)	外型尺寸 Dimensions(L×W×H)(mm)	重量 Weight(kg)
VSI-3000	45(70)	1760-2210	30-60	55-90	3080×1757×2126	≤5555
VSI-4000	55(70)	1550-1940	50-90	110-150	4100×1930×2166	≤7020
VSI-5000	65(80)	1330-1670	80-150	150-220	4300×2215×2427	≤11650
VSI-6000	70(80)	1190-1490	120-250	220-320	5300×2728×2773	≤15100
VSI-7000	70(80)	1050-1310	180-350	264-400	5300×2728×2863	≤17090
VSI-8000	80(150)	1000-1100	250-380	400-440	6000×3000×3420	≤23450
VSI-9000	80(150)	1000-1100	380-600	440-630	6000×3022×3425	≤23980

注： 1. 上述通过量是在破碎物料密度为 1.6 t/m³ 时开路循环生产中总吨数。生产能力与破碎物料的物理性能、给料方式、进料粒度及其组成有关；
2. 括号内数值适用于低磨蚀性物料等特殊工况条件下，详情请咨询山美工程师；
3. 液压开盖和自动润滑装置为选装配置。

Note: 1. Throughput is total tons per hour passing through crusher at open circuit when crushing mid-hard material and bulk density with 1.6 t/m³. Capacities are relative to physical character and type of feeding, feeding size and composition and so on.
2. The number in the brackets is applicable to some special conditions, such as low abrasive materials. For more details, please refer to SANME engineers.
3. Hydraulic decap and automatic lubricating device are optional configuration.



上海山美环保装备股份有限公司
SHANGHAI SANME MINING MACHINERY CORP., LTD.
(中德合资控股)
(Sino-German JV Holding)



山美股份官方微信

版权所有 翻印必究 中国印制 Printed in China
SANME-10C | VSI | 2020-09 | 5000

地址：上海市奉贤区青村镇奉村路 258 号
邮编：201414
电话：021-5759 1166 5759 1188
传真：021-5756 6188 5820 0089
网址：www.shsmzj.com
电邮：info@sanmecorp.com

Add: No.258, Fengcun Road, Qingcun County, Fengxian District,
Shanghai 201414, China
Tel: +86-21-5712 1166 5759 1188
Fax: +86-21-5756 6188 5820 0089
Website: www.sanmecrusher.com
E-mail: sales@sanmecorp.com

免费热线：400-921-5566
售后专线：021-5712 7766

Free Hotline: 400-921-5566
Service Center: +86-21-5712 7766

- ◎ 我们的产品在不断的更新和改进中，我们保留在未事先告知用户的情况下，更改参数及设计的权力。
Our products are constantly updated and improved, we reserve the right to change parameters and design without advance notification of customers.
- ◎ 照片中产品外观颜色与实际机型存在差异，颜色标准以实物为准。
If there are any discrepancy and difference between color of product appearance and actual machine type in the picture, color standard is subject to actual object.
- ◎ 本手册中的配置不一定是出厂标准配置，购买时请详细咨询我们。
Specifications and design in the brochures are not always the standard. Please consult us particularly when purchasing.